


TOTAL HEAD (PSI) PER STAGE

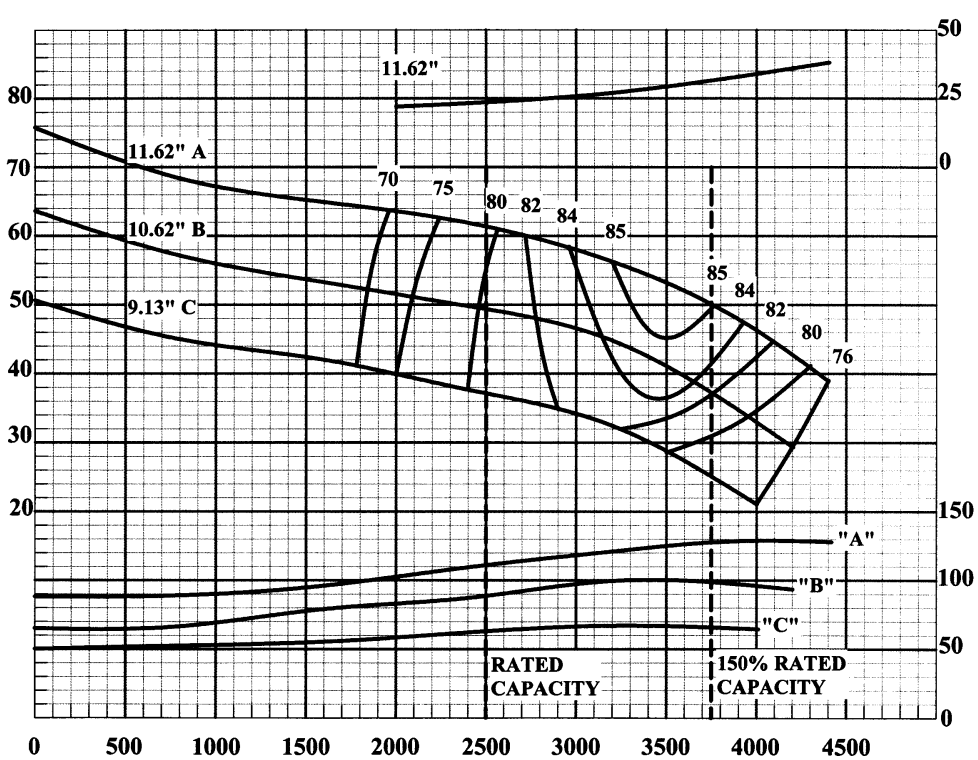

NPSH Req'd FT

HORSEPOWER PER STAGE

Curve No. 2500FP16DMC
Model: FP16DMC
RPM: 1770
Efficiency Correction STG: 1 -1.0
Perf based on STD materials
Impeller: B8822
NS = 2859 K = 18.0 LBS/FT 26.6 KG/M
Characteristics based upon pumping clear non-aerated water. Rating point only is guaranteed. Column lossed not included.

Pressure Range: UL & FM Approved
17 6- 430Ft (76 - 186 PSI)

GPM