


TWO STAGE PERFORMANCE

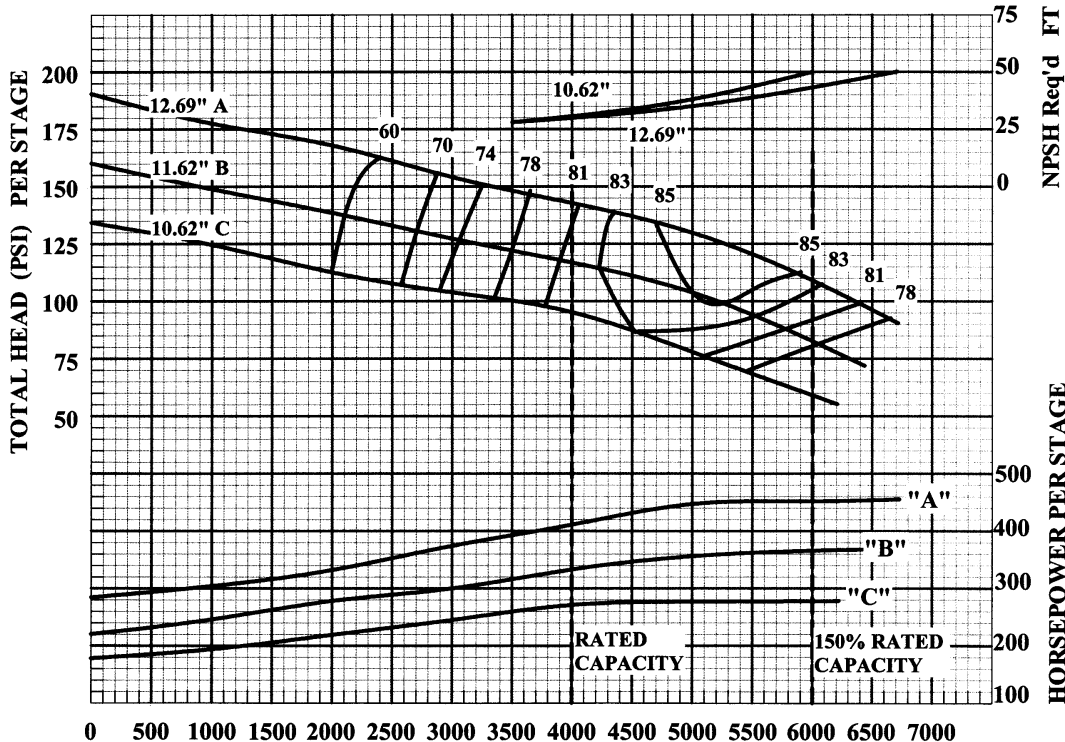

Curve No. 4000FP18DHC
Model: FP18DHC
RPM: 1770
Efficiency Correction STG: 1 -1.0
Perf based on STD materials
Impeller: B02403B
NS = 3087 K = 21.0 LBS/FT 31.2 KG/M
Characteristics based upon pumping clear non-aerated water. Rating point only is guaranteed. Column loss not included.

Pressure Range: UL & FM Approved
220 - 330Ft (95 - 143 PSI)

GPM