


USE FOR FIRST STAGE ONLY

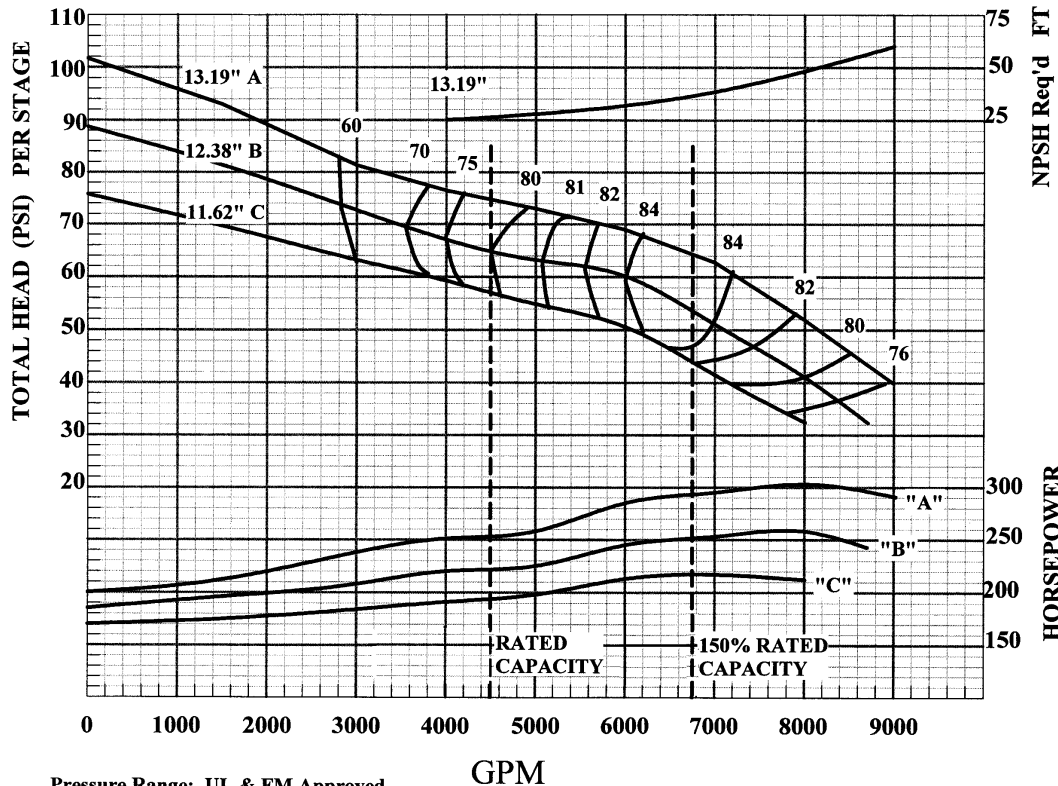

Curve No. 4500FP20EHC
Model: FP20EHC
RPM: 1770
Efficiency Correction STG: 1 0
Perf based on STD materials
Impeller: B02409B
NS = 3651 30.3 LBS/FT K = 45.1 KG/M
Characteristics based upon pumping clear non-aerated water. Rating point only is guaranteed. Column loss not included.

Pressure Range: UL & FM Approved
130 - 300Ft (56.5 - 130 PSI)

GPM

HORSEPOWER