


**USE FOR SECOND STAGE ONLY**

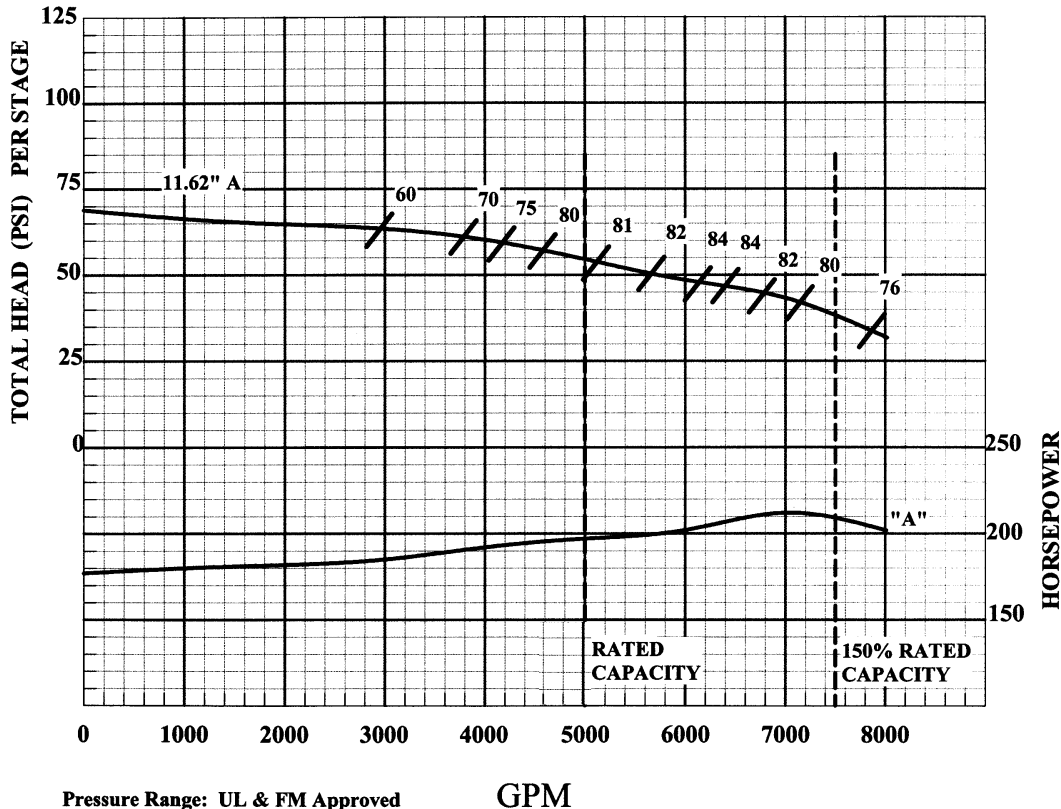

Curve No. <b>5000FP20EHC-2</b>
Model: <b>FP20EHC</b>
RPM: <b>1770</b>
Efficiency Correction
Perf based on STD materials
Impeller: <b>B02407B</b>
NS = <b>3651</b> 30.3 LBS/FT K = <b>45.1 KG/M</b>
Characteristics based upon pumping clear non-aerated water. Rating point only is guaranteed. Column loss not included.

Pressure Range: UL & FM Approved  
127 - 294Ft (55 - 127 PSI)

GPM