


USE FOR FIRST STAGE ONLY

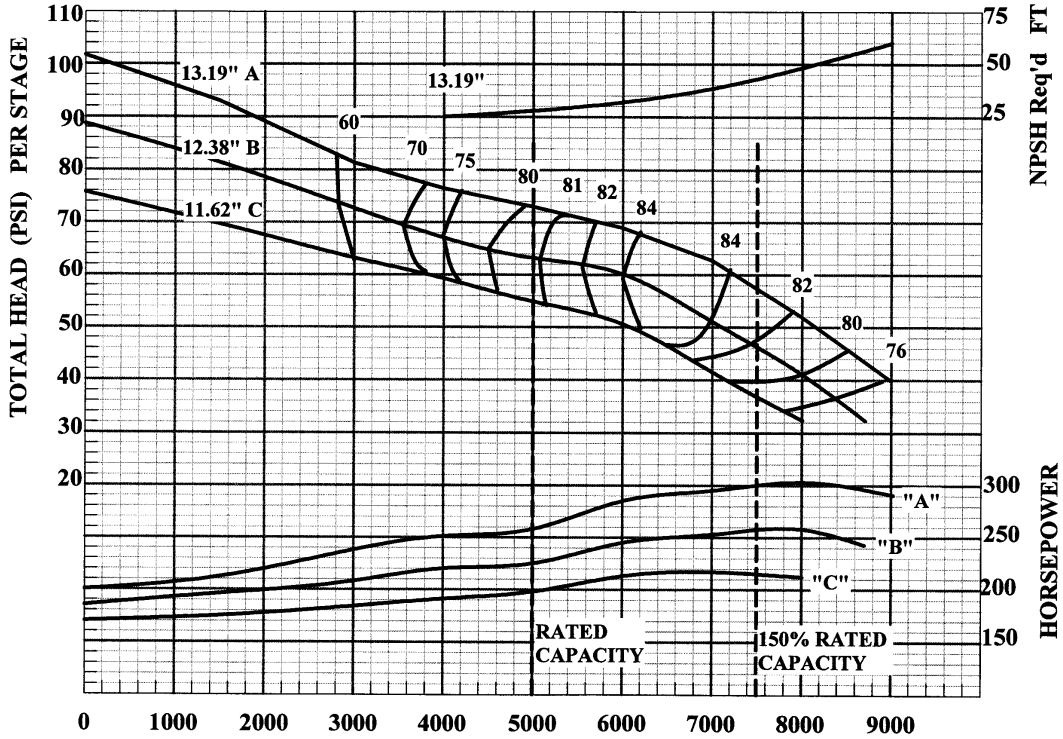

Curve No. 5000FP20EHC
Model: FP20EHC
RPM: 1770
Efficiency Correction STG: 1 0
Perf based on STD materials
Impeller: B02409B
NS = 3651 K = 30.3 LBS/FT 45.1 KG/M
Characteristics based upon pumping clear non-aerated water. Rating point only is guaranteed. Column loss not included.

Pressure Range: UL & FM Approved
127 - 294Ft (55 - 127 PSI)

GPM

HORSEPOWER